

## CARATTERISTICHE SPECIFICATIONS

The fork hooks are suitable for lifting bundles or single steel plates. High bundles of steel plates can be easily handled due to the large opening of the forks.



Operating condition (standard steel plates):

- With 4 legs chain or wire rope sling
- Angle at the inner top of the sling: 45° to 60° max
- Max lifting speed: 8 m/min
- Max trolley speed: 10 m/min
- Operating temperature: 0-100°C

L'attrezzatura è idonea al sollevamento di pacchi o singole lamiere come alternativa al bilancino. Pacchi di lamiere di grande spessore possono essere movimentati velocemente e facilmente grazie all'ampia capacità di presa.

Condizioni di impiego (lamiere standard):

- Utilizzo con tirante a 4 bracci a catena o fune
- Angolo al vertice  $\beta$  (interno al tirante): da 45° a 60° max
- Velocità max sollevamento: 8 m/min
- Velocità max traslazione: 10 m/min
- Temperatura di impiego: 0-100°C

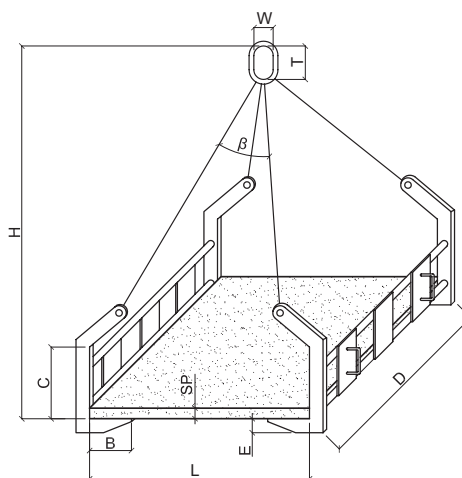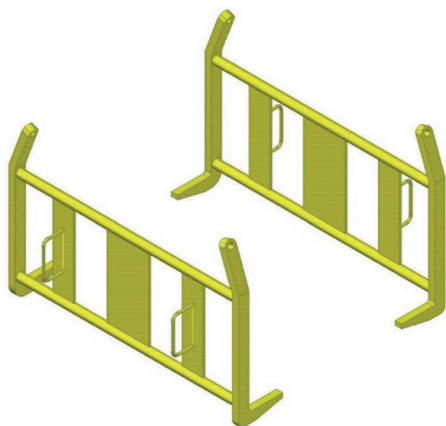

## DATI TECNICI STAFFE PER LAMIERE STANDARD TECHNICAL DATA FORK HOOKS FOR STANDARD STEEL PLATES

Tipo Type	Portata* Capacity*		Dimensioni lamiera Steel plate dimensions				Dimensioni staffe Fork hooks dimensions				Altezza persa circa Lost height approx	Peso* Weight*	Portata grillo Shackle size	Dimensione campanella Master link dimension
	min kg	max kg	Larghezza Width L		Spessore Thickness SP		B mm	C mm	D mm	E mm				
GH 20	200	2000	1000	1500	15	380	150	450	1000	40	1600	50	3,25	95 x 160
GH 30	320	3200	1000	1500	25	380	150	450	1000	40	1800	52	3,25	95 x 160
GH 40	400	4000	1100	1600	30	420	160	500	1100	50	2000	78	4,75	105 x 170
GH 50	500	5000	1100	2600	35	420	160	500	1100	50	2000	82	4,75	105 x 170
GH 63	630	6300	1400	2000	35	470	180	550	1200	60	2300	120	4,75	110 x 190
GH 80	800	8000	1400	2000	40	470	180	550	1200	60	2300	126	4,75	110 x 190

\* Portata e peso di una coppia di staffe escluso tirante.

\* Capacity and weight of a pair of fork hooks without sling.

Only when dimensions of the steel plates or conditions at the working place are different from table below

- 1) Width of the steel plates  
Min. mm .....  
Max mm .....
- 2) Load to be lifted  
Min Kg .....  
Max Kg .....
- 3) Thickness of the bundle or single steel plate  
Min mm .....  
Max mm .....
- 4) Free height under the steel plates .....
- 5) Free height available at the working place .....

Da compilare in presenza di lamiere o condizioni nel luogo di impiego diverse da quelle descritte nella tabella

- 1) Larghezza lamiera  
Min. mm .....  
Max mm .....
- 2) Carico da sollevare con la coppia di staffe  
Min Kg .....  
Max Kg .....
- 3) Altezza lamiera o pacco di lamiere  
Min mm .....  
Max mm .....
- 4) Luce libera per il passaggio dei piedini sotto il pacco di lamiere mm .....
- 5) Altezza utile disponibile nel luogo di lavoro mm .....