


| Codice<br>Code | Diametro filetto<br>Thread diameter |      | Regolazione<br>Take up |      | Portata<br>WLL<br>t | Tenditore<br>Turnbuckle         |                               | Dimensioni<br>Dimensions |     |           |         |          |         |         |         | Peso<br>Weight<br>Kg |          |
|----------------|-------------------------------------|------|------------------------|------|---------------------|---------------------------------|-------------------------------|--------------------------|-----|-----------|---------|----------|---------|---------|---------|----------------------|----------|
|                | A<br>inch                           | inch | mm                     | mm   |                     | Chiuso<br>Closed<br>L min<br>mm | Aperto<br>Open<br>L max<br>mm | L1<br>mm                 | B   | ØB2<br>mm | C<br>mm | C2<br>mm | D<br>mm | E<br>mm | F<br>mm |                      | CH<br>mm |
| ATENOFR0209    | 1/2                                 | 9    | 229                    | 1    | 1                   | 390                             | 619                           | 138,5                    | 3/8 | 11,5      | 26      | 18       | 16      | 229     | 269     | 19                   | 0,79     |
| ATENOFR0312    | 5/8                                 | 12   | 305                    | 1,59 | 1,59                | 514                             | 800                           | 180                      | 1/2 | 13,5      | 32,5    | 21,5     | 18      | 305     | 356     | 24                   | 2,1      |
| ATENOFR0406    | 3/4                                 | 6    | 152                    | 2,36 | 2,36                | 391                             | 543                           | 110                      | 5/8 | 16,5      | 38      | 25,5     | 24      | 152     | 213     | 30                   | 1,92     |
| ATENOFR0409    | 3/4                                 | 9    | 229                    | 2,36 | 2,36                | 465                             | 694                           | 149                      | 5/8 | 16,5      | 38      | 25,5     | 24      | 229     | 289     | 30                   | 2,31     |
| ATENOFR0412    | 3/4                                 | 12   | 305                    | 2,36 | 2,36                | 541                             | 846                           | 187                      | 5/8 | 16,5      | 38      | 25,5     | 24      | 305     | 366     | 30                   | 2,72     |
| ATENOFR0512    | 7/8                                 | 12   | 305                    | 3,27 | 3,27                | 570                             | 875                           | 192,5                    | 3/4 | 18,6      | 42,5    | 32,5     | 27,5    | 305     | 376     | 32                   | 3,69     |
| ATENOFR0606    | 1                                   | 6    | 152                    | 4,54 | 4,54                | 472                             | 624                           | 121                      | 7/8 | 23,5      | 50,5    | 36,6     | 30,5    | 152     | 234     | 36                   | 3,86     |
| ATENOFR0612    | 1                                   | 12   | 305                    | 4,54 | 4,54                | 623                             | 928                           | 198                      | 7/8 | 23,5      | 50,5    | 36,6     | 30,5    | 305     | 386     | 36                   | 5,44     |
| ATENOFR0712    | 1 1/4                               | 12   | 305                    | 6,9  | 6,9                 | 676                             | 981                           | 211                      | 29  | 29        | 71,5    | 46,5     | 44      | 305     | 385     | 46                   | 9,75     |
| ATENOFR0812    | 1 1/2                               | 12   | 305                    | 9,71 | 9,71                | 715                             | 1020                          | 222                      | 35  | 32        | 71      | 54,5     | 52      | 305     | 401     | 55                   | 17,3     |
| ATENOFR0818    | 1 1/2                               | 18   | 457                    | 9,71 | 9,71                | 870                             | 1327                          | 298                      | 35  | 32        | 71      | 54,5     | 52      | 457     | 553     | 55                   | 19,5     |
| ATENOFR0918    | 1 3/4                               | 18   | 457                    | 12,7 | 12,7                | 938                             | 1316                          | 295                      | 41  | 38        | 86      | 60,5     | 59,5    | 457     | 577     | 70                   | 30,9     |

- Coefficiente di sicurezza 5.
- Temperatura di utilizzo: 0°C ÷ 200°C.
- Filetto UNC.
- Safety factor 5.
- Temperature range: 0°C ÷ 200°C.
- UNC thread.

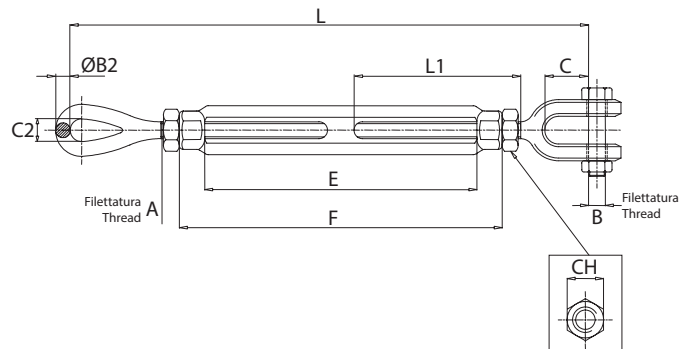

### Tipo ROF OCCHIO-FORCELLA

Perno, canaula, forcelle e occhi acciaio C45  
Finitura: zincatura a caldo

### ROF EYE-JAW Type

Pin, body and jaws steel C45  
Finish: hot dip galvanized