


## Catene e accessori Winner - Grado 10

Winner chain and  
accessory system in G10

### Complessivo ad un braccio VMXKW 1

VMXKW 1 Single leg clevis master set

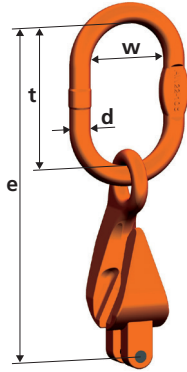


| Tipo<br>Type | Portata<br>WLL<br>Kg | Per catena<br>For chain<br>Ø | Per ganci<br>DIN 15401<br>Fits on<br>single hook acc.<br>to DIN 15401<br>n° | Dimensioni<br>Dimensions |         |         |         | Peso<br>Weight<br>Kg |
|--------------|----------------------|------------------------------|---|--------------------------|---------|---------|---------|----------------------|
|              |                      |                              |   | d<br>mm                  | e<br>mm | t<br>mm | w<br>mm |                      |
| VMXKW 1-5/6* | 1400                 | 6                            | 4   | 14                       | 204     | 120     | 70      | 0,74                 |
| VMXKW 1-7    | 1900                 | 7                            | 4   | 14                       | 242     | 120     | 70      | 1,06                 |
| VMXKW 1-8    | 2500                 | 8                            | 5   | 16                       | 262     | 140     | 80      | 1,30                 |
| VMXKW 1-10   | 4000                 | 10                           | 6   | 19                       | 319     | 160     | 95      | 2,34                 |
| VMXKW 1-13   | 6700                 | 13                           | 10  | 23                       | 373     | 170     | 105     | 4,39                 |
| VMXKW 1-16   | 10000                | 16                           | 11  | 27                       | 424     | 190     | 110     | 7,45                 |

\* Idoneo anche per catena da 5 mm, con portata ridotta in accordo.

\* May also be used with a 5 mm chain, if load capacity is adjusted accordingly.

### Complessivo a due bracci VMXKW 2

VMXKW 2 Two legs clevis master set

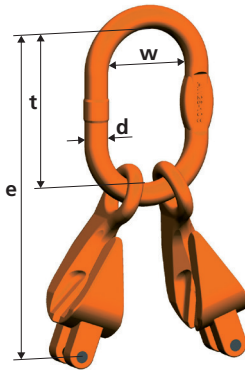


| Tipo<br>Type | Portata<br>0°-45°/45°-60°<br>WLL<br>0°-45°/45°-60°<br>Kg | Per catena<br>For chain<br>Ø | Per ganci<br>DIN 15401<br>Fits on<br>single hook acc.<br>to DIN 15401<br>n° | Dimensioni<br>Dimensions |         |         |         | Peso<br>Weight<br>Kg |
|--------------|--|------------------------------|---|--------------------------|---------|---------|---------|----------------------|
|              |  |                              |   | d<br>mm                  | e<br>mm | t<br>mm | w<br>mm |                      |
| VMXKW 2-5/6* | 2000 / 1400  | 6                            | 4   | 14                       | 204     | 120     | 70      | 1,04                 |
| VMXKW 2-7    | 2650 / 1900  | 7                            | 5   | 16                       | 262     | 140     | 80      | 1,91                 |
| VMXKW 2-8    | 3550 / 2500  | 8                            | 6   | 19                       | 282     | 160     | 95      | 2,35                 |
| VMXKW 2-10   | 5600 / 4000  | 10                           | 10  | 23                       | 329     | 170     | 105     | 4,19                 |
| VMXKW 2-13   | 9500 / 6700  | 13                           | 10  | 27                       | 393     | 190     | 110     | 8,05                 |
| VMXKW 2-16   | 14000 / 10000  | 16                           | 12  | 33                       | 464     | 230     | 130     | 14,38                |

\* Idoneo anche per catena da 5 mm, con portata ridotta in accordo.

\* May also be used with a 5 mm chain, if load capacity is adjusted accordingly.

### Complessivo a quattro bracci VMXKW 4

VMXKW 4 Four legs clevis master set

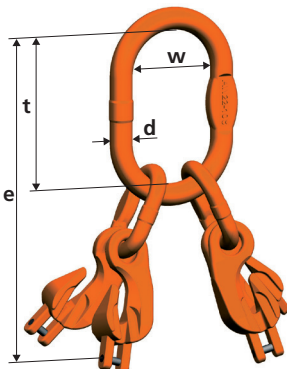

| Tipo<br>Type | Portata<br>0°-45°/45°-60°<br>WLL<br>0°-45°/45°-60°<br>Kg | Per catena<br>For chain<br>Ø | Per ganci<br>DIN 15401<br>Fits on<br>single hook acc.<br>to DIN 15401<br>n° | Dimensioni<br>Dimensions |         |         |         | Peso<br>Weight<br>Kg |
|--------------|--|------------------------------|---|--------------------------|---------|---------|---------|----------------------|
|              |  |                              |   | d<br>mm                  | e<br>mm | t<br>mm | w<br>mm |                      |
| VMXKW 4-5/6* | 3000 / 2120  | 6                            | 6   | 19                       | 298     | 160     | 95      | 2,63                 |
| VMXKW 4-7    | 4000 / 2800  | 7                            | 10  | 23                       | 362     | 170     | 105     | 4,84                 |
| VMXKW 4-8    | 5300 / 3750  | 8                            | 10  | 23                       | 362     | 170     | 105     | 4,93                 |
| VMXKW 4-10   | 8000 / 6000  | 10                           | 10  | 27                       | 434     | 190     | 110     | 9,01                 |
| VMXKW 4-13   | 14000 / 10000  | 13                           | 12  | 33                       | 548     | 230     | 130     | 17,90                |
| VMXKW 4-16   | 21200 / 15000  | 16                           | 20  | 38                       | 649     | 275     | 150     | 30,52                |

\* Idoneo anche per catena da 5 mm, con portata ridotta in accordo.

\* May also be used with a 5 mm chain, if load capacity is adjusted accordingly.