


Catene e accessori Winner Pro - Grado 12

Winner Pro chain and
accessory system in G12

Campanella maggiorata VLWP 1


VLWP 1 Enlarged master link

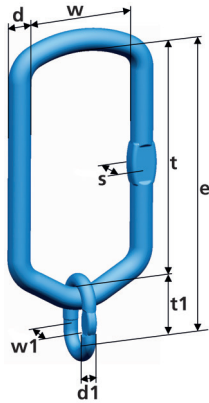


Tipo Type	Assemblaggio Consisting of	Portata WLL Kg	Dimensioni Dimensions								Peso Weight Kg	Campanella per catena Ø Master link for chain Ø 1 br./leg mm
			d mm	d1 mm	e mm	t mm	t1 mm	w mm	w1 mm	s mm		
VLWP 1-7/8	LWP 22 + BWP 13	3000	23	13	394	340	54	155	25	16,5	3,37	7+8
VLWP 1-10	LWP 26 + BWP 16	5000	27	17	410	340	70	155	34	21	3,56	10
VLWP 1-13	LWP 26	8000	27	-	340	340	-	155	-	21	4,40	13
VLWP 1-16	LWP 32	12500	33	-	340	340	-	155	-	26	6,60	16

Campanella maggiorata VLWP 2/4


VLWP 2/4 Enlarged master link

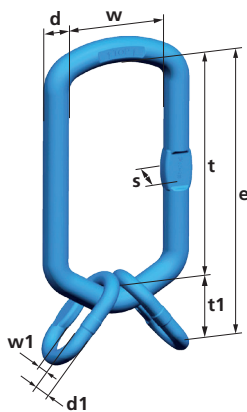

Tipo Type	Assemblaggio Consisting of	Portata 0°-45° WLL 0°-45° Kg	Dimensioni Dimensions								Peso Weight Kg	Campanella per catena Ø Master link for chain Ø	
			d mm	d1 mm	e mm	t mm	t1 mm	w mm	w1 mm	s mm		2 br./legs mm	3/4 br./legs mm
VLWP 2-7/8	LWP 22 + 2 BWP 13	4250	23	13	394	340	54	155	25	16,5	3,60	7/8	-
VLWP 2-10 / 4-7/8	LWP 26 + 2 BWP 16	7100	27	17	410	340	70	155	34	21	5,20	10	7/8
VLWP 2-13 / 4-10	LWP 32 + 2 BWP 20	11200	33	20	425	340	85	155	40	26	8,00	13	10
VLWP 2-16	LWP 36	17500	38	-	340	340	-	155	-	29	8,90	16	-
VLWP 4-13	LWP 36 + 2 BWP 26	17000	38	27	480	340	140	155	65	29	12,80	-	13
VLWP 4-16	LWP 40 + 2 BWP 32	26500	40	33	490	340	150	155	70	29	16,30	-	16



Da 0° a 45° i bracci sono posizionati al centro dell'anello.
From 0° - 45°, the chain legs are positioned at the centre of the ring.



Tra 45° e 60°, i bracci della catena sono posizionati agli angoli esterni dell'anello.
Between 45° - 60°, the chain legs are positioned at the outer corners of the ring.

